


HOWSE

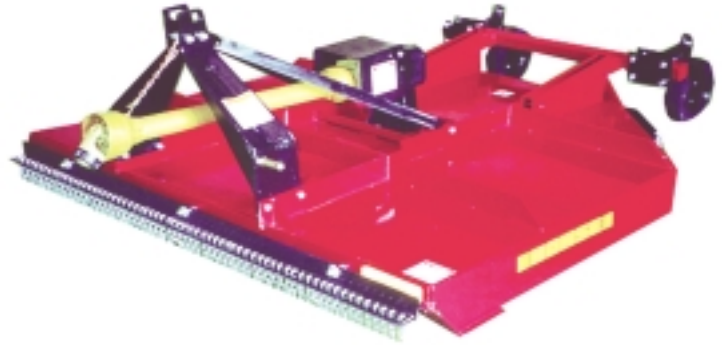

MEDIUM HEAVY SINGLE WHEEL

MEDIUM HEAVY DUAL WHEEL

MEDIUM HEAVY AND HEAVY DUTY ROTARY CUTTERS

MODEL #	APPROX BLADE TIP SPEED FPM	SUGGESTED HORSE POWER	DESCRIPTION	APPROX WT.
MH5C	12,378	25-45	5' Cutter - Single Wheel	779 lbs.
MH6C	14,853	40-75	6' Cutter - Single Wheel	892 lbs.
MH7CT4	17,329	50-85	7' Cutter - Single Wheel	1237 lbs.
MH72CT4	17,329	50-85	7' Cutter - Dual Wheel	1442 lbs.
5100C	12,378	30-45	5' Cutter - Single Wheel	910 lbs.
5102C	12,378	30-45	5' Cutter - Dual Wheel	1070 lbs.
6100C	14,853	40-75	6' Cutter - Single Wheel	1087 lbs.
6102C	14,853	40-75	6' Cutter - Dual Wheel	1247 lbs.
7100C	17,329	50-85	7' Cutter - Single Wheel	1363 lbs.
7102C	17,329	50-85	7' Cutter - Dual Wheel	533 lbs.
8100C	19,805	65-85	8' Cutter - Single Wheel	1452 lbs.
8102C	19,805	65-85	8' Cutter - Dual Wheel	1666 lbs.

- Heavy duty 3" tube frame, all models except MH
- Heavy flat bar cross braced frame, MH models
- Saucer-shaped blade carrier 1/4" pan with 1"X4" bar 5', 6', & 7' models
- Oblong blade carrier, 1/4 pan & 3/4"x 6" bar 8' models
- Cast wheel hub with 1 1/2" fork shaft MH 5 & MH 6
- Bearing type hub with 2" fork shaft all other models
- 100-horsepower gearbox - 5' and 6' models
- 150-horsepower gearbox ,7' and 8' models
- Category 1 hitch and lift pins - 5' & 6' models

- Category 2 hitch and lift pins 7' & 8' models
- Laminated rubber tires
- 10 Gauge deck with 8 1/2" sides MH models
- 3/16 Deck with 8 1/2" sides, all models except MH
- Category 6 shearpin driveshaft - Standard on 5' and 6' models
- Category 6 torque limiter driveshaft Standard on 7' and 8' model Optional on 5' and 6' models
- 1/2"X3 1/2" Air lift blades
- All models are quick hitch compatible



HEAVY DUTY SINGLE WHEEL

HEAVY DUTY DUAL WHEEL

All Howse Rotary Cutters come standard with chain guards. However, they may be purchased without chain guards if the customer prefers. Howse recommends chain guards on all Howse Rotary Cutters.

